


D-VTA 200

Video-based Thermography for Cement Plants

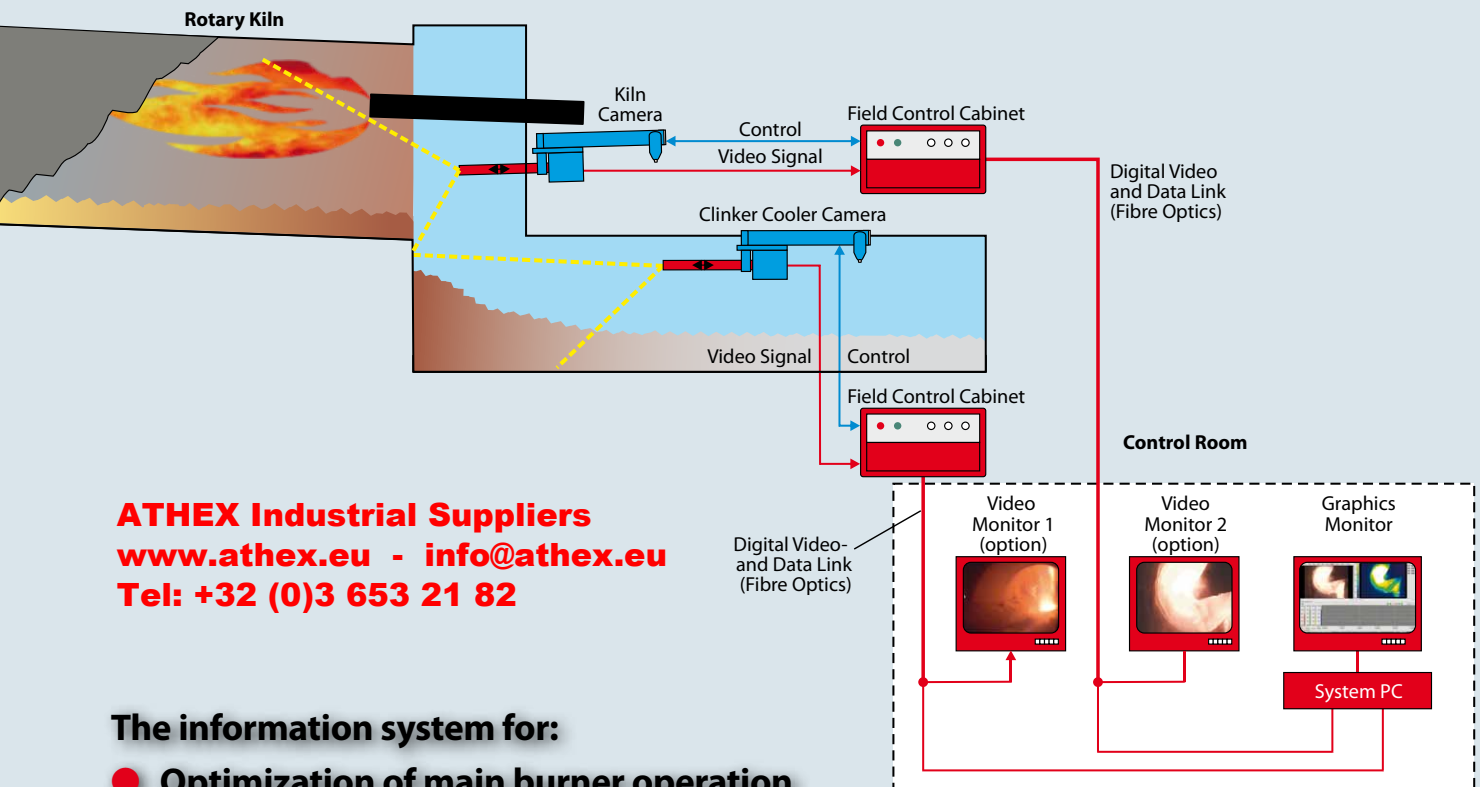

ATHEX Industrial Suppliers
www.athex.eu - info@athex.eu
 Tel: +32 (0)3 653 21 82

The information system for:

- Optimization of main burner operation
- Secondary fuel control
- Free lime prediction
- Stabilization of product quality
- Detection of „snowman“ and „red river“
- Optimization of maintenance and repair cycles

Video Monitoring

The D-VTA 200 video and thermography system

is a modular system specially developed for use in the cement industry, to monitor the clinker manufacturing process. Intelligent sensors allow contactless, optical and thermal online analysis of processes in the sinter zone in rotary kilns and in clinker coolers.

The sensors

have been specially developed for the harsh working conditions of the cement industry.

The sensor housing contains the special video-scope or boroscope as optical system, the industrial CCD camera and the spectroscopy components. In this design all electronic components are operated outside the kiln area, in the cooled camera housing.

The slim, water-cooled sensor shaft (Ø 43mm) minimises the mechanical stress (abrasive dust) and the thermal influence on the sensor parts in the combustion chamber.

The optical system is protected against mechanical and thermal damage by sapphire glass at the sensor tip, in addition to air flushing. As no moving parts (no mirrors, prisms or motors) are located in the process-oriented area, the sensors achieve a high availability with minimum service requirement.

The field components

- pneumatically operated retraction system with monitoring units for the cooling and flushing media, including integrated air accumulator
- Field control cabinet for control of the sensors, operation of the optional spectrometers and the signal processing for the data and video transmission via fibre-optic cable to the control room.

The control room equipment

- System computer for temperature calculation, thermography presentation and spectroscopy data processing for free lime prediction
- Video monitor for live color image of the process.

The video system

The basic system comprises the above-mentioned system components, without system computer.

It enables real-time colour video display, visual monitoring of the process sequence in the sinter zone in the kiln outlet/clinker cooler and provides information with regard to:

- Flame form and position
- Main burner position and state
- Clinker formation: Consistency, thickness, caking; ring formation, „snowman“ and „red river“.

Thermography

The thermography analyzing system

The thermography system comprises the components of the video system plus the system computer with software modules.

It operates as a spatial optical pyrometer on the basis of image data processing and offers, in addition to the video system:

- Temperature determination of each visible image point of the video sensor
- Thermal analysis of the local temperature distribution
- Temperature definition within freely definable measuring window and lines (ROI = Region of Interest / LOI = Line Of Interest).
- Analysis of thermal samples to identify anomalies in the burning and cooler process

All data of the thermography system can be transmitted to the process control system via a standardized data interface.

The spectroscopy system with free lime prediction

In addition to the components of the thermography system, spectrometers are required in the field PC of the field control cabinet, as well as quartz glass fibre-optics for connection to the sensor. The spectroscopy system analyses the radiation from the combustion and sinter process in the rotary kiln. It expands the scope of performance of the video and thermography system by the following functions:



Video image from the rotary kiln



Combustion chamber sensor with retraction unit (water-cooled)



Anneliese Zementwerke Gesecke, Germany




ROMCIF Fieni, Romania




Rohrdorfer Zement Rohrdorf, Germany

Analysis System

- Measurement of the flame and clinker temperatures (reference)
- Assessment of the thermal influence of the main burner flame on the burning process (radiation behaviour and temperature transition).
- Free lime prediction from correlation of spectroscopy data and process data (DURAG patent). This prediction indicates the process trend sensitively and at an early stage, providing the possibility of process optimization.

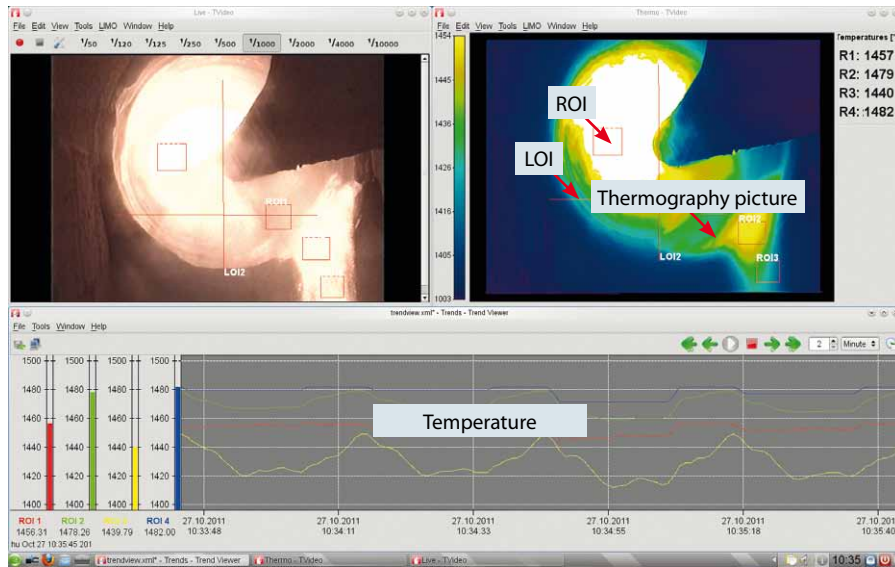

The user interface of the thermography analysis system

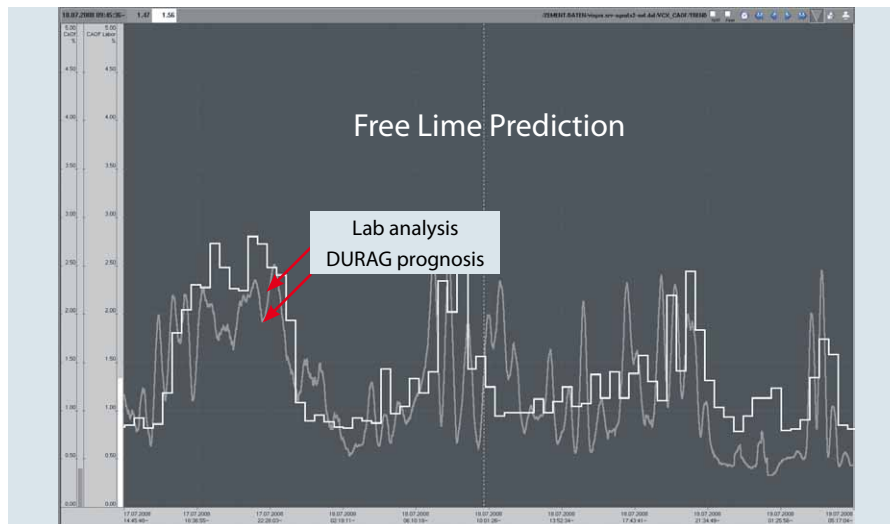

Free lime prediction



Holcim Siggenthal, Switzerland



W&P Wietersdorf, Austria



Buzzi Unicem Vernasca, Italy

Technical data

| | |
|---|---|
| Video system | PAL, picture elements: 752(H) x 582(V), fixed focus |
| Thermography from total radiation | Temperature range 1000°C – 2000°C |
| Optical alignment | Sensor 0°: axially-parallel to sensor axis, Sensor 45°: angled 45° to sensor axis |
| Optical field of view | Sensor 0°: horizontal 72°, vertical 54°, diagonal 90°; Sensor 45°: horizontal 48°, vertical 36°, diagonal 60° |
| Data interfaces on the system PC | RS232, RS422, RS485; ASCII, MODBUS; Ethernet: TCP/IP; FTP, MODBUS |
| Auxiliary energy | 230 V / 60 Hz & 115 V / 50 Hz, 500 VA |
| Gas temperature the kiln or cooler | Water-cooled sensor <2000°C |
| Ambient temperature | Sensor / Retraction: 0°C...60°C, Field control cabinet: 0°C...55°C |
| Material | Sensor: stainless steel 1.4571 / 1.4301, Field cabinet: steel sheet, painted in RAL 7035 |
| Dimensions / Weights | Diameter of sensor tip: water-cooled 43 mm |
| Immersion depth the kiln or cooler | max. 450 mm from welding plate |
| Space requirement for sensor / retraction device | 1450 x 500 x 800 mm (LxWxH) |
| Field cabinet | 600 x 380 x 210 mm (HxWxD) |
| Cable length | Sensor/Retraction – Field control cabinet 10 m |
| Connection Site / Control Room | Optical Fiber, max. 1000 m |
| System PC | 19" industrial housing, 4 HE, depth 450 mm |
| Weights | Sensor with retraction and carrier 70 kg, field control cabinet 15 kg |
| Cooling water volume | 350 l/h, 1.5...8 barg |
| Cooling water temperature | Inlet: <45°C, Outlet: Temperature increase <10° C |
| Cooling water quality | Clean, chemically neutral, non-corrosive, Hardness: <5°dH / <28 mMol/l |
| Compressed air volume | max. 25 Nm ³ /h |
| Compressed air pressure | 5 – 8 barg |
| Compressed air temperature | 5...40°C |
| Compressed air quality | dry, free from dust, aerosols, oil quality |