



Dialight



DuroSite® Stainless Steel LED Linear Luminaire CE

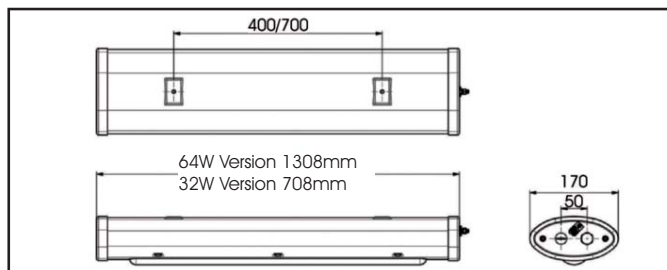

Emergency Version

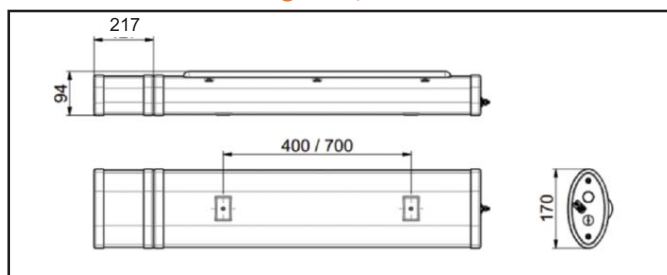


Certifications

- CE - Compliant with EN55015:2006 / EN61547:2009 / EN60598:2008
- IP 66/67 rated
- IK09 to EN 50102
- C & D shock compliant to MOD specification BR8470
- RoHS compliant

Features & Benefits

- L70 rated for >100,000 hours @ 25°C ambient
- 5 year full performance warranty (Battery not included)
- Instant on/off operation
- Universal input (100-277V AC, 50/60Hz), (Emergency 230-240V AC)
- Superior colour rendition index compared to HPS, LPS, MV
- Mercury free
- Resistant to shock and vibration
- Easy retrofit solution for existing fluorescent fittings due to same size and fixing centres
- Factory safety shackle option available

Photometric Information



Application:

The Dialight DuroSite® LED Linear luminaire with its low profile, rugged design ensures long life and high reliability for a wide variety of Industrial applications. Offered in 32W and 64W versions to replicate the light output of typical 2 x 18W & 2 x 36W fluorescent luminaires respectively, Dialight offers a range of mounting options for use with the DuroSite® Linear luminaire.

Mechanical Information

| | |
|-----------------------------|--|
| Fixture Weight: | |
| Standard Version: | 1308mm - 11.4kg (25.1lbs) 708mm - 6.5kg (14.3lbs) |
| Emergency Version: | 1525mm - 14.5kg (32 lbs) 925mm - 9.1kg (19.8 lbs) |
| Shipping Weight: | |
| Standard Version: | 1308mm - 14.2kg (31.3lbs) 708mm - 9.1kg (20lbs) |
| Emergency Version: | 1525mm - 17.5kg (38.6 lbs) 925mm - 11.3kg (25 lbs) |
| Shipping Dimensions: | 1308mm - 240 x 160 x 1640 708mm - 240 x 160 x 1040 |
| Mounting: | (2) M8 fixing points |
| Cable Entry: | 2 x M20 cable entries at both ends, through wired as standard. Consult factory for other options |

Electrical specifications

| | |
|---------------------------------|------------------------------------|
| Operating Voltage | |
| Standard Version: | 100-277V AC 50/60Hz |
| Emergency Version: | 230-240V AC 50/60Hz |
| Power Consumption: | See ordering information |
| Operating Temp: | -20°C to +60°C (-4°F to +140°F) |
| Noise Requirements/ EMC: | EN 61000-3-2: 2006 |
| THD: | <15% @ 120 V AC <20% @ 230 V AC |

| | |
|--------------------------|--|
| Surge Protection: | EN-61000-4-5 1 kV line to line 2 kV line to ground |
|--------------------------|--|

| | |
|----------------------|-------|
| Power Factor: | > 0.9 |
|----------------------|-------|

Emergency Versions

| | |
|-------------------------------|----------------|
| Battery: | 3.6V 10Ah NiMH |
| Expected Battery Life: | 4 years |
| Battery duration: | >180 Minutes |

Materials

| | |
|-----------------------------|---|
| Housing and Fixings: | 316 Marine grade stainless steel |
| Lens: | High Impact resistant polycarbonate |
| Mounting Brackets: | 316L Stainless steel |
| Safety Shackle: | Optional factory fitted stainless steel safety shackle with 1.5 metre safety cord |

Photometric Information

| | |
|-------------------|---------------------|
| CCT: | 5,650K (cool white) |
| CRI: | 70 (cool white) |
| IES Files: | Consult factory |

All values typical unless otherwise stated
All lumen values are typical (tolerance +/- 10%)







DuroSite® Stainless Steel LED Linear Luminaire

Ordering Information

| Part Number | Voltage | Colour | Entry Options | Lumens | Watts | Lumens Per Watt |
|-------------------|---------------|--------|---------------|--------|-------|-----------------|
| EL-1C3R-SSCB | 100 - 277V AC | CW | 2 at each end | 5,100 | 64 | 86 |
| EL-1C3M-SSCB | 100 - 277V AC | CW | 2 at each end | 2,600 | 32 | 86 |
| Emergency Version | | | | | | |
| ELE-1C4R-SSCB | 230 / 240V AC | CW | 2 at each end | 5,100 | 70 | 73 |
| ELE-1N4R-SSCB | 230 / 240V AC | NW | 2 at each end | 5,100 | 70 | 73 |
| ELE-1C4M-SSCB | 230 / 240V AC | CW | 2 at each end | 2,600 | 35 | 74 |
| ELE-1N4M-SSCB | 230 / 240V AC | NW | 2 at each end | 2,600 | 35 | 74 |


Lm/W are under constant review and improvement, please consult technical department for latest achievable values
For factory fitted safety shackle option, add 1 as a suffix to the part code. E.g EL-1C3R-SSCB-1

Mounting Options & Accessories


| | Part Number | Description | Kit Includes |
|---|---------------|--|---|
|  | ELX-PC-SS-42 | ø40 - 45mm Range Marine Grade Stainless Steel Pole Clamp | 2 x Pole clamp bracket Mounting hardware |
| | ELX-PC-SS-47 | ø47 - 51mm Range Marine Grade Stainless Steel Pole Clamp | |
| | ELX-PC-SS-54 | ø54 - 57mm Range Marine Grade Stainless Steel Pole Clamp | |
| | ELX-PC-SS-59 | ø59 - 62mm Range Marine Grade Stainless Steel Pole Clamp | |
|  | ELX-EYE | Marine Grade Stainless Steel Eyelet kit | 2 x M8 Eyelets Mounting Hardware |
|  | ELX-CMB | Marine Grade Stainless Steel Ceiling Mount Kit | Bracket Mounting hardware |
|  | ELX-WMB-SS-30 | 30° Marine Grade Stainless Steel Wall Mount Kit | Bracket Mounting hardware |
| | ELX-WMB-SS-45 | 45° Marine Grade Stainless Steel Wall Mount Kit | |
| | ELX-WMB-SS-60 | 60° Marine Grade Stainless Steel Wall Mount Kit | |
| | ELX-WMB-SS-90 | 90° Marine Grade Stainless Steel Wall Mount Kit | |

Mounting Options & Accessory Dimensions


Pole Clamp

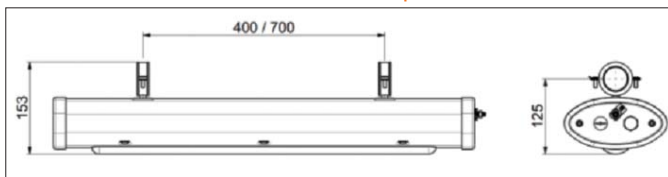


Eyelet

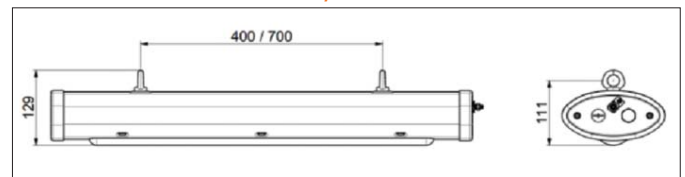


Ceiling Mount

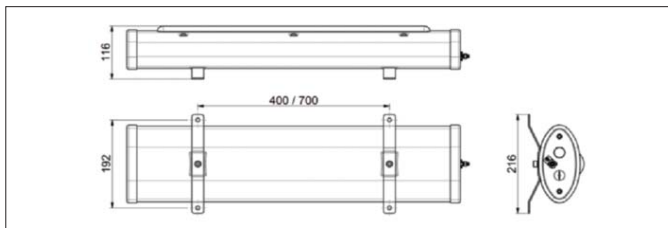


Wall Mount Bracket 30°

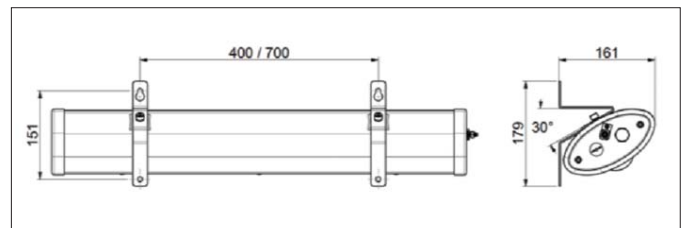


Wall Mount Bracket 45°

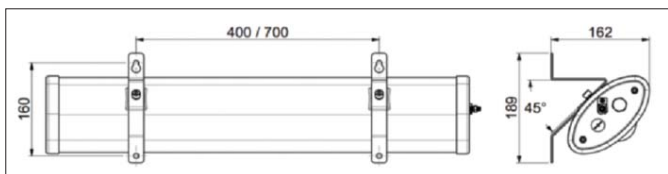

Wall Mount Bracket 60°

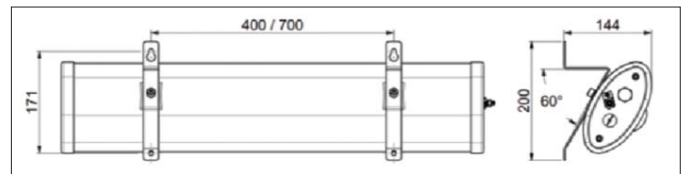

Wall Mount Bracket 90°

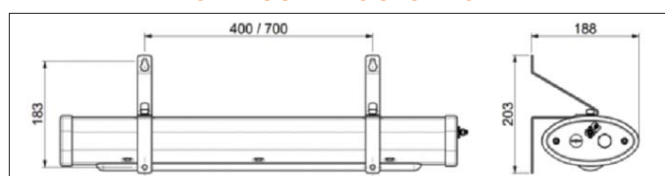

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialight.com/Assets/Brochures_And_Catalogs/Illumination/MDTFSFSHZLDSEUX001.pdf
Warranty Statement: EXCEPT FOR THE WARRANTY EXPRESSLY PROVIDED FOR [HEREIN/ABOVE/BELOW], DIALIGHT DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NON-INFRINGEMENT.